

CLAIMS:

- Sub
A,
- 5
1. A method of creating an image, said image to be formed by rendering and compositing at least a plurality of graphical objects, each said object having a predetermined outline, said method comprising the steps of:
- dividing a space in which said outlines are defined into a plurality regions, each said region being defined by at least one region outline substantially following at least one of said predetermined outlines or parts thereof and being substantially formed by segments of a virtual grid encompassing said space;
- 10 manipulating said regions to determine a plurality of further regions, wherein each said further region has a corresponding compositing expression;
- classifying said further regions according to at least one attribute of said graphical objects within said further regions;
- modifying each said corresponding compositing expression according to a classification of each said further region to form an augmented compositing expression
- 15 for each said further region; and
- compositing said image using each of said augmented compositing expressions.
- 20
2. A method according to claim 1, wherein said attribute is selected from the group consisting of colour, opacity and object outline.
3. A method according to claim 1, wherein said manipulating said regions comprises applying set operations to said regions.
- 25
4. A method according to claim 3, wherein said set operations include difference and/or intersection operations.
5. A method according claim 1, wherein said grid is regularly spaced and preferably orthogonally based.
- 30
6. A method according to claim 1, wherein said grid is irregularly shaped.
7. A method according to claim 1, wherein the compositing expression is a hierarchically structured representation of the image.
- 664060-69528660
- Sub
A

8. A method according to claim 1, wherein said image is at least in part a pixel-based image.

5 9. A method according to claim 1, wherein a flag is stored to indicate whether data of an object is opaque or ordinary.

10 10. A method according to claim 9, wherein said compositing expression is optimized based on a value of said flag for contributing objects.

11. A method according to claim 1, wherein a wholly opaque object in said region acts to eliminate one or more objects within said region from said compositing expressions.

15 12. A method according to claim 1, wherein a wholly transparent object in said region eliminates at least itself from said compositing expression.

20 13. A method according to claim 1, wherein said modifying comprises modifying a manner in which said compositing expression is evaluated without modifying said hierarchically structured representation.

545
Ar 14. A method of creating an image, said image to be formed by rendering and compositing at least a plurality of graphical objects, each said object having a predetermined outline, said method comprising the steps of:

25 dividing a space in which said outlines are defined into a plurality regions, each said region being defined by at least one region outline substantially following at least one of said predetermined outlines or parts thereof and being substantially formed by segments of a virtual grid encompassing said space, wherein each object has two region outlines arranged either side of said predetermined outline to thus define three regions for
30 each said object, and wherein each said region has a corresponding compositing expression;

classifying said regions according to at least one attribute of said graphical objects within said regions;

35 modifying each said corresponding compositing expression according to a classification of each said region to form an augmented compositing expression for each

said region; and

compositing said image using each of said augmented compositing expressions.

15. A method according to claim 14, wherein said attribute is selected from
5 the group consisting of colour, opacity and object outline.

16. A method according to claim 14, wherein said grid is regularly spaced
and preferably orthogonally based.

10 17. A method according to claim 14, wherein said grid is irregularly shaped.

18. A method according to claim 14, wherein said compositing expression is
a hierarchically structured representation of the image.

15 19. A method according to claim 14, wherein said image is at least in part a
pixel-based image.

20. A method according to claim 14, wherein a flag is stored to indicate
whether data of an object is opaque or ordinary.

20 21. A method according to claim 20, wherein said compositing expression is
optimized based on a value of said flag for contributing objects.

22. A method according to claim 14, wherein a wholly opaque object in said
25 region acts to eliminate one or more objects within said region from said compositing
expressions.

23. A method according to claim 14, wherein a wholly transparent object in
said region eliminates at least itself from said compositing expression.

30 24. A method according to claim 14, wherein said modifying comprises
modifying a manner in which said compositing expression is evaluated without
modifying said hierarchically structured representation.

25. An apparatus for creating an image, said image to be formed by rendering
and compositing at least a plurality of graphical objects, each said object having a

Sw
A3
35

[illegible]

5

further regions, wherein each said further region has a corresponding compositing

10

according to a classification of each said further region to form an augmented

15

from the group consisting of colour, opacity and object outline.

20

difference and/or intersection operations.

25

shaped.

is a hierarchically structured representation of the image.

35

33. An apparatus according to claim 25, wherein a flag is stored to indicate whether data of an object is opaque or ordinary.

35. An apparatus according to claim 25, wherein a wholly opaque object in said region acts to eliminate one or more objects within said region from said compositing expressions.

37. An apparatus according to claim 25, wherein said modifying comprises modifying a manner in which said compositing expression is evaluated without modifying said hierarchically structured representation.

20
Sub
A4

classifying means for classifying said regions according to at least one attribute of said graphical objects within said regions;

compositing means for compositing said image using each of said augmented

compositing expressions.

39. An apparatus according to claim 38, wherein said attribute is selected from the group consisting of colour, opacity and object outline.

5

40. An apparatus according to claim 38, wherein said grid is regularly spaced and preferably orthogonally based.

10

41. method according to claim 38, wherein said grid is irregularly shaped.

42. An apparatus according to claim 38, wherein said compositing expression is a hierarchically structured representation of the image.

15

43. An apparatus according to claim 38, wherein said image is at least in part a pixel-based image.

44. An apparatus according to claim 38, wherein a flag is stored to indicate whether data of an object is opaque or ordinary.

20

45. An apparatus according to claim 44, wherein said compositing expression is optimized based on a value of said flag for contributing objects.

25

46. An apparatus according to claim 38, wherein a wholly opaque object in said region acts to eliminate one or more objects within said region from said compositing expressions.

47. An apparatus according to claim 38, wherein a wholly transparent object in said region eliminates at least itself from said compositing expression.

30

48. An apparatus according to claim 38, wherein said modifying comprises modifying a manner in which said compositing expression is evaluated without modifying said hierarchically structured representation.

35

49. A computer program product including a computer readable medium having a plurality of software modules for creating an image, said image to be formed by

093759-00199

SW
AS

rendering and compositing at least a plurality of graphical objects, each said object having a predetermined outline, said computer program product comprising:

dividing module for dividing a space in which said outlines are defined into a plurality regions, each said region being defined by at least one region outline
5 substantially following at least one of said predetermined outlines or parts thereof and being substantially formed by segments of a virtual grid encompassing said space;

manipulating module for manipulating said regions to determine a plurality of further regions, wherein each said further region has a corresponding compositing expression;

10 classifying module for classifying said further regions according to at least one attribute of said graphical objects within said further regions;

modifying module for modifying each said corresponding compositing expression according to a classification of each said further region to form an augmented compositing expression for each said further region; and

15 compositing module for compositing said image using each of said augmented compositing expressions.

50. A computer program product according to claim 49, wherein said attribute is selected from the group consisting of colour, opacity and object outline.

20 51. A computer program product according to claim 49, wherein said manipulating said regions comprises applying set operations to said regions.

25 52. A computer program product according to claim 51, wherein said set operations include difference and/or intersection operations.

53. A computer program product according to claim 49, wherein said grid is regularly spaced and preferably orthogonally based.

30 54. A computer program product according to claim 49, wherein said grid is irregularly shaped.

35 55. A computer program product according to claim 49, wherein said compositing expression is a hierarchically structured representation of the image.

56. A computer program product according to claim 49, wherein said image is at least in part a pixel-based image.

57. A computer program product according to claim 49, wherein a flag is stored to indicate whether data of an object is opaque or ordinary.

58. A computer program product according to claim 57, wherein said compositing expression is optimized based on a value of said flag for contributing objects.

59. A computer program product according to claim 49, wherein a wholly opaque object in said region acts to eliminate one or more objects within said region from said compositing expressions.

60. A computer program product according to claim 49, wherein a wholly transparent object in said region eliminates at least itself from said compositing expression.

61. A computer program product according to claim 49, wherein said modifying comprises modifying a manner in which said compositing expression is evaluated without modifying said hierarchically structured representation.

62. A computer program product including a computer readable medium having a plurality of software modules for creating an image, said image to be formed by rendering and compositing at least a plurality of graphical objects, each said object having a predetermined outline, said computer program product comprising:

dividing module for dividing a space in which said outlines are defined into a plurality regions, each said region being defined by at least one region outline substantially following at least one of said predetermined outlines or parts thereof and being substantially formed by segments of a virtual grid encompassing said space, wherein each object has two region outlines arranged either side of said predetermined outline to thus define three regions for each said object, and wherein each said region has a corresponding compositing expression;

classifying module for classifying said regions according to at least one attribute of said graphical objects within said regions;

09387560-000100

Sw
Ag

compositing module for compositing said image using each of said augmented
5 compositing expressions.

10 64. A computer program product according to claim 62, wherein said grid is
regularly spaced and preferably orthogonally based.

15 66. A computer program product according to claim 62, wherein said
compositing expression is a hierarchically structured representation of the image.


20

69. A computer program product according to claim 68, wherein said
25 compositing expression is optimized based on a value of said flag for contributing
objects.

30

35

72. A computer program product according to claim 62, wherein said modifying comprises modifying a manner in which said compositing expression is evaluated without modifying said hierarchically structured representation.

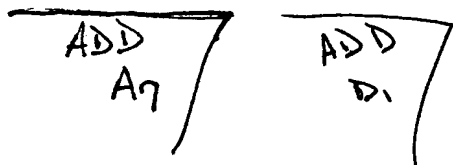

00337560-000199